




AiM ACC3

Analog CAN Converter

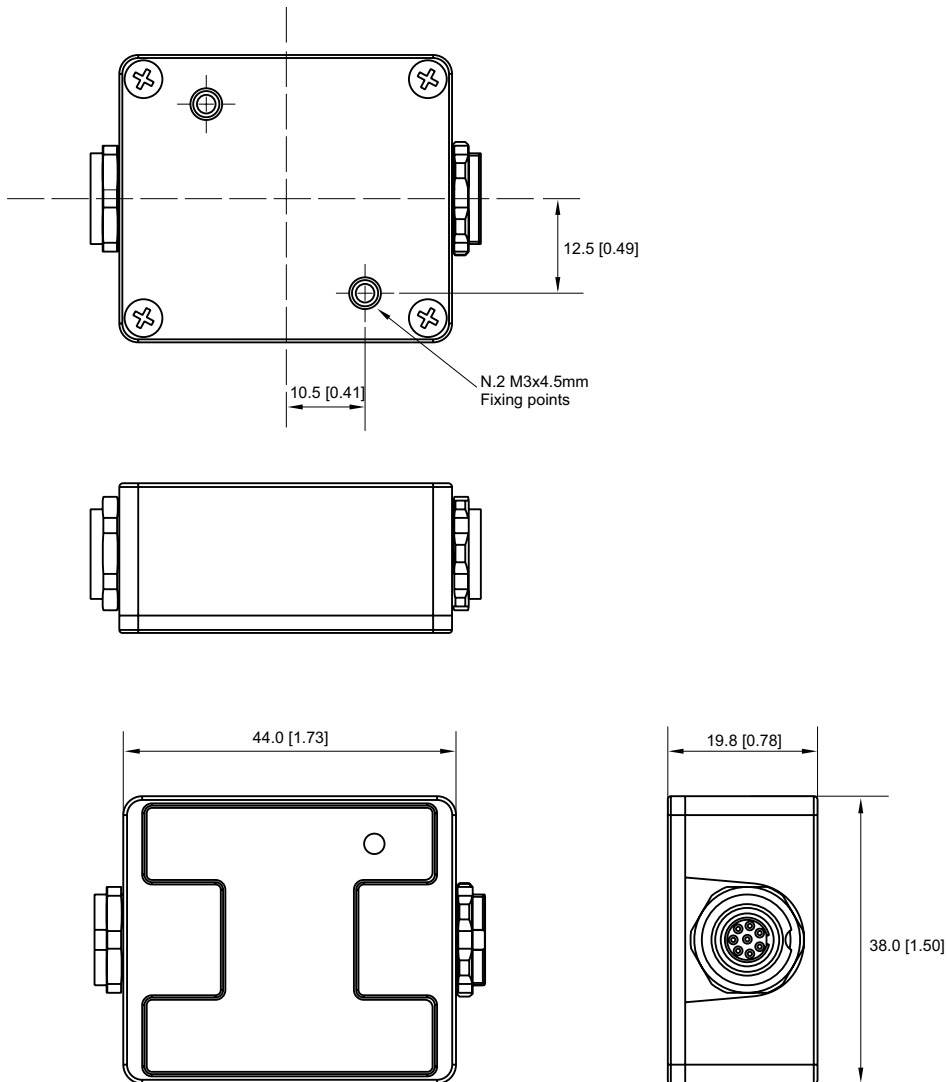

Dimensions in mm [inches]




AiM ACC3

Analog CAN Converter

Technical specifications

Analog channels	4 fully configurable channels, 1 kHz each: TC, TR, 0÷5 V, 0÷12 V Two inputs may be configured also as speed input channels
Speed inputs	2 (AN3-AN4), max frequency 10 kHz, internal pull-up for open drain/collector input
External power	9÷15 V
Connections	CAN
Connectors	2 Binder 712 female connectors
Material	PA6 30% glass
Dimensions	44.0 x 38.0 x 19.8 mm
Weight	50 g
Waterproof	IP65

Pinout








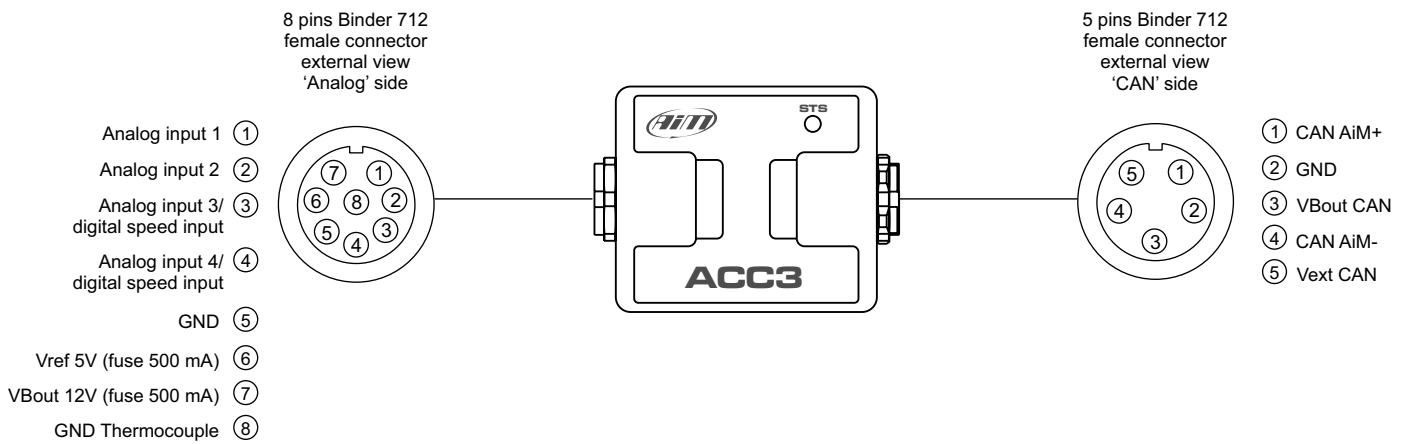






AiM ACC3

Analog CAN Converter

Connections - Part 1

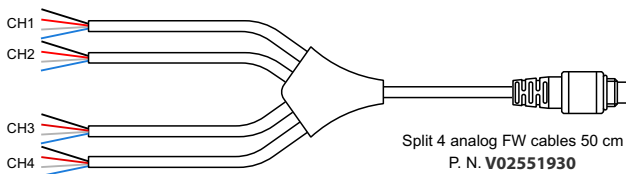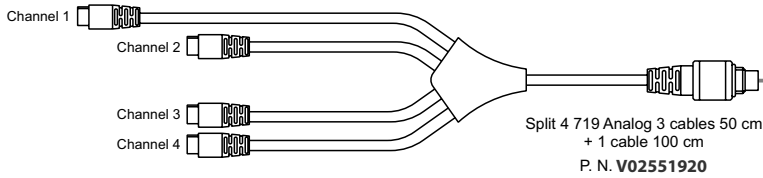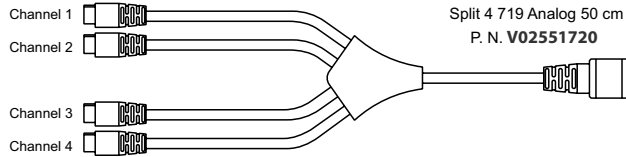

CAN cable AiM - 5MM712
P. N. V02554790 (50 cm)
P. N. V02554810 (100 cm)
P. N. V02554820 (200 cm)
P. N. V02554830 (400 cm)






AiM ACC3

Analog CAN Converter

Connections - Part 2

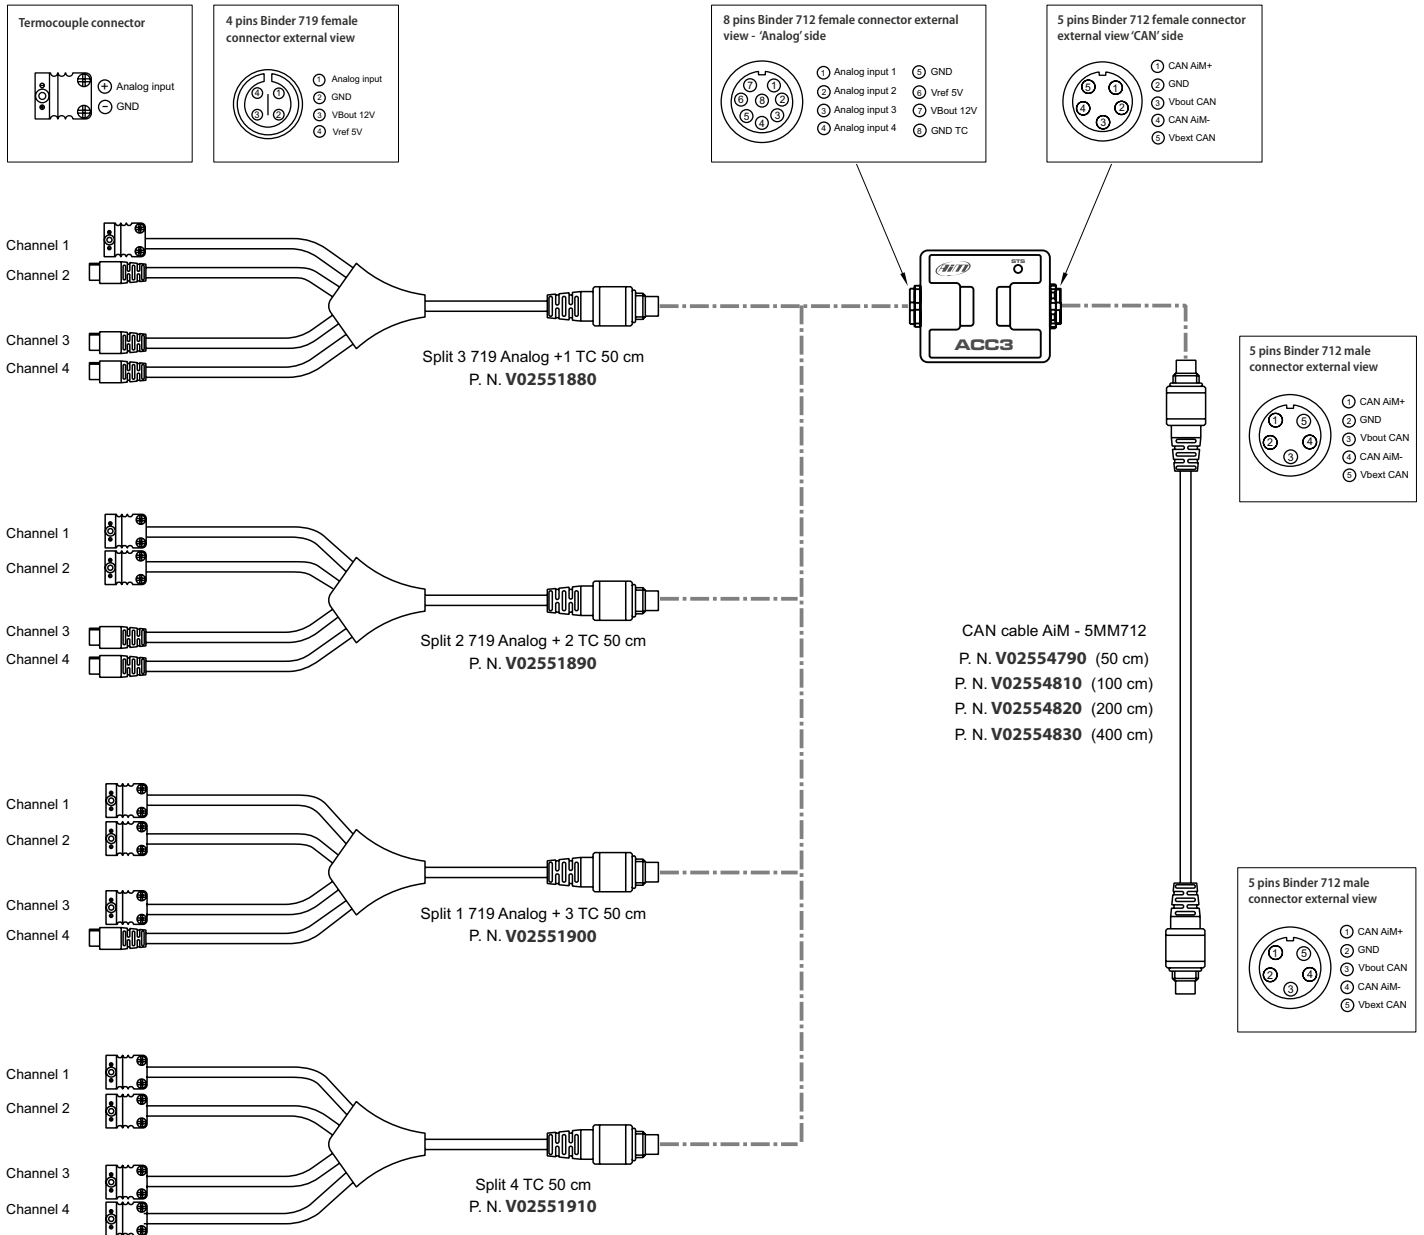




AiM ACC3

Analog CAN Converter

Connections - Part 3

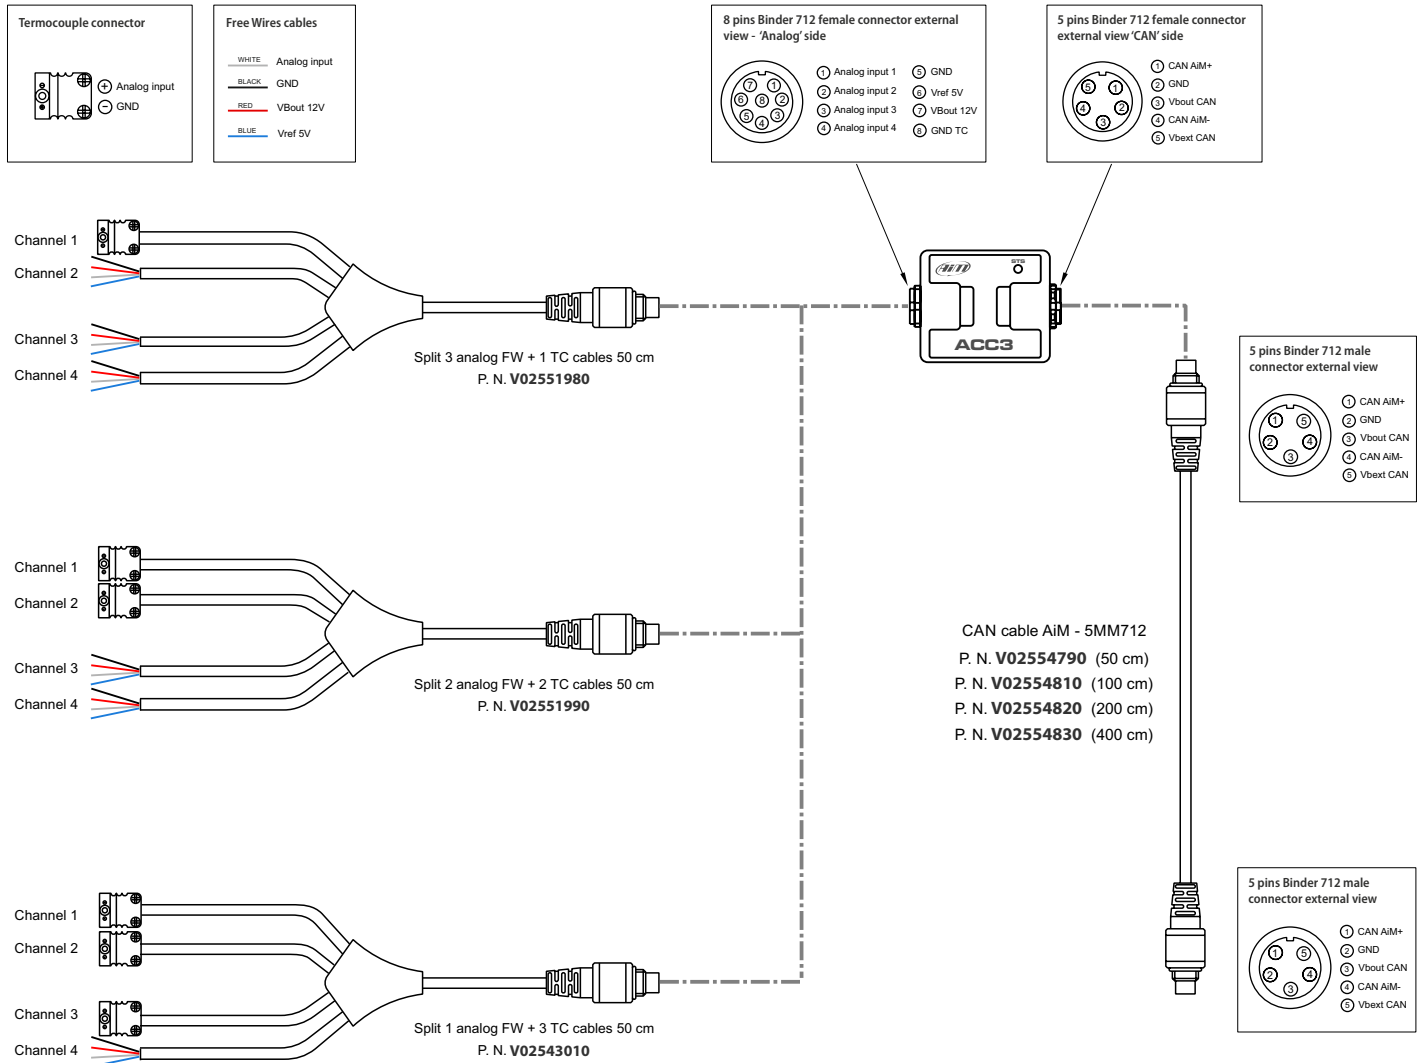



AiM ACC3

Analog CAN Converter

Available kits

X08ACC3AP4050	ACC3 + Split 4 719 Analog 50 cm + CAN cable 50 cm
X08ACC3AP4100	ACC3 + Split 4 719 Analog 50 cm + CAN cable 100 cm
X08ACC3AP4200	ACC3 + Split 4 719 Analog 50 cm + CAN cable 200 cm
X08ACC3AP4400	ACC3 + Split 4 719 Analog 50 cm + CAN cable 400 cm
X08ACC3AP3050	ACC3 + Split 3 719 Analog 1 TC 50 cm + CAN cable 50 cm
X08ACC3AP3100	ACC3 + Split 3 719 Analog 1 TC 50 cm + CAN cable 100 cm
X08ACC3AP3200	ACC3 + Split 3 719 Analog 1 TC 50 cm + CAN cable 200 cm
X08ACC3AP3400	ACC3 + Split 3 719 Analog 1 TC 50 cm + CAN cable 400 cm
X08ACC3AP2050	ACC3 + Split 2 719 Analog 2 TC 50 cm + CAN cable 50 cm
X08ACC3AP2100	ACC3 + Split 2 719 Analog 2 TC 50 cm + CAN cable 100 cm
X08ACC3AP2200	ACC3 + Split 2 719 Analog 2 TC 50 cm + CAN cable 200 cm
X08ACC3AP2400	ACC3 + Split 2 719 Analog 2 TC 50 cm + CAN cable 400 cm
X08ACC3AP1050	ACC3 + Split 1 719 Analog 3 TC 50 cm + CAN cable 50 cm
X08ACC3AP1100	ACC3 + Split 1 719 Analog 3 TC 50 cm + CAN cable 100 cm
X08ACC3AP1200	ACC3 + Split 1 719 Analog 3 TC 50 cm + CAN cable 200 cm
X08ACC3AP1400	ACC3 + Split 1 719 Analog 3 TC 50 cm + CAN cable 400 cm
X08ACC3AP0050	ACC3 + Split 4 TC 50 cm + CAN cable 50 cm
X08ACC3AP0100	ACC3 + Split 4 TC 50 cm + CAN cable 100 cm
X08ACC3AP0200	ACC3 + Split 4 TC 50 cm + CAN cable 200 cm
X08ACC3AP0400	ACC3 + Split 4 TC 50 cm + CAN cable 400 cm



AiM ACC3

Analog CAN Converter

Accessories & optional parts

V02551920	Split 4 719 Analog 3 cables 50 cm + 1 cable 100 cm
V02551720	Split 4 719 Analog 50 cm
V02551880	Split 3 719 Analog + 1 TC 50 cm
V02551890	Split 2 719 Analog + 2 TC 50 cm
V02551900	Split 1 719 Analog + 3 TC 50 cm
V02551910	Split 4 TC 50 cm
V02551930	Split 4 Analog FW cables 50 cm
V02551980	Split 3 Analog FW + 1 TC cables 50 cm
V02551990	Split 2 Analog FW + 2 TC cables 50 cm
V02543010	Split 1 Analog FW + 3 TC cables 50 cm
V02554790	CAN cable AiM - 5MM712 50 cm
V02554810	CAN cable AiM - 5MM712 100 cm
V02554820	CAN cable AiM - 5MM712 200 cm
V02554830	CAN cable AiM - 5MM712 400 cm